


120, 240, 277 AC & 250 DC LED FLOOD LIGHTS

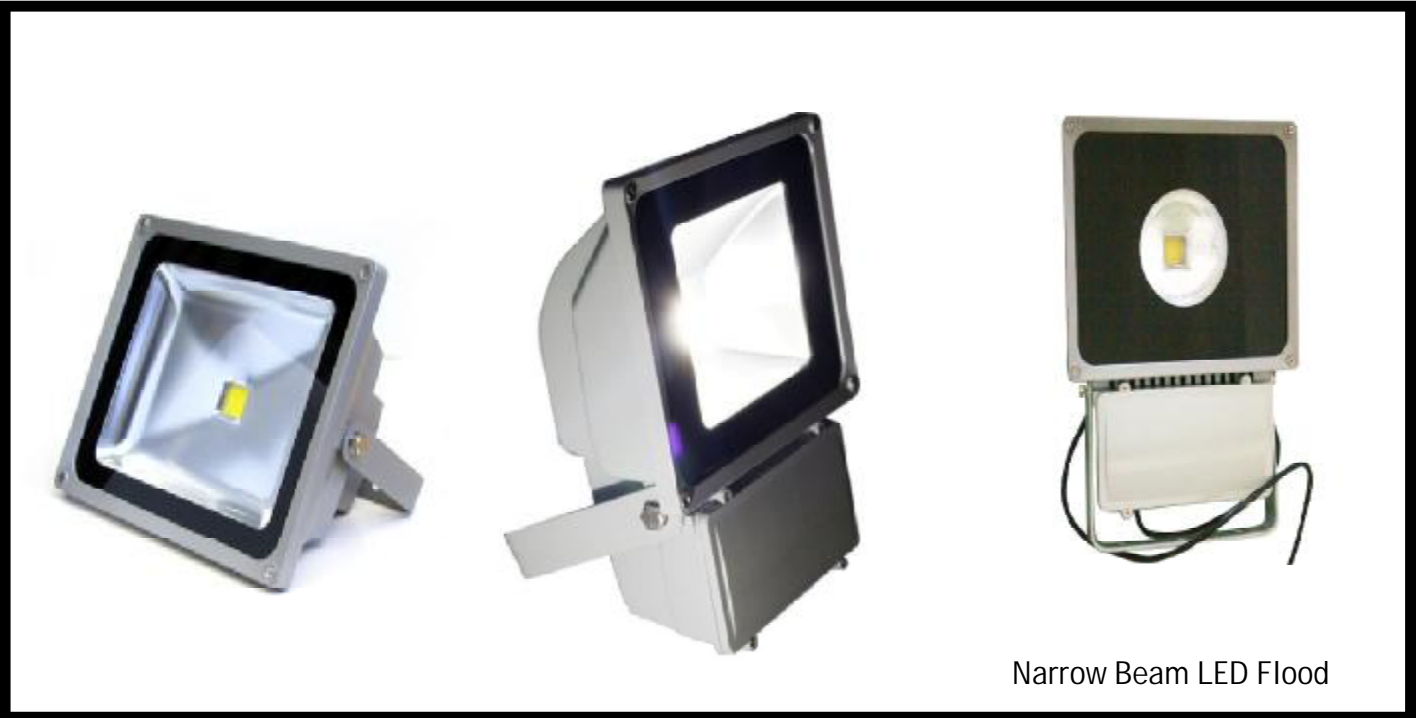

Narrow Beam LED Flood

LED 50 WATT FLOOD LIGHT

This 50 Watt Medium Beam (130 Degrees) LED Flood Light provides an excellent light source for industrial applications replacing high maintenance Incandescent and expensive High Pressure Sodium & Metal Halide sources.

Because LED does not contain toxic Mercury, your lighting is much safer. These LED lamps have an average lifetime of 50,000 hours, giving you many years of maintenance free usage.

SPECIFICATIONS:

- Body material: Aluminum die casting
- Dimensions: 11.42" X 9.30"
- Color: White • Average Life: 50,000 Hours
- Wattage: 50 Watts • Lumens: 3800 lm
- Viewing Angle: 130 Degrees
- Compare to Metal Halide Lamps of 200 Watts
- Voltage: 85 to 260 VAC, 277 VAC & 250 VDC
- DC model polarity Protected
- IP Degree: IP65 = Dust and water jet protection
- Ambient Temperature Range: -40+60C

FL-50LED-85-260 85 to 260 AC 50 W. Medium Beam LED Flood Light
 FL-50LED-250 250 DC 50 W. Medium Beam LED Flood Light
 FL-50LED-277 277 VAC 50 W. Medium Beam LED Flood Light
 /Photo Dust to Dawn PhotoCell
 Option (factory installed)

LED 80 WATT FLOOD LIGHT

This 80 Watt Medium Beam (130 Degrees) LED Flood Light provides an excellent light source for industrial applications replacing high maintenance Incandescent and expensive High Pressure Sodium & Metal Halide sources.

Because LED does not contain toxic Mercury, your lighting is much safer. These LED lamps have an average lifetime of 50,000 hours, giving you many years of maintenance free usage.

SPECIFICATIONS:

- Body material: Aluminum die casting
- Dimensions: 11.22" X 14.17"
- Color: White • Average Life: 50,000 Hours
- Wattage: 80 Watts • Lumens: 5800 lm
- Viewing Angle: 130 Degrees
- Compare to Metal Halide Lamps of 400 Watts
- Voltage: 85 to 260 VAC, 277 VAC & 250 VDC
- DC model polarity Protected
- IP Degree: IP65 = Dust and water jet protection
- Ambient Temperature Range: -40+60C

FL-80LED-85-260 85 to 260 AC 80 W. Medium Beam LED Flood Light
 FL-80LED-250 250 DC 80 W. Medium Beam LED Flood Light
 FL-80LED-277 277 VAC 80 W. Medium Beam LED Flood Light
 /Photo Dust to Dawn PhotoCell
 Option (factory installed)

LED 90 WATT FLOOD LIGHT

This 90 Watt Narrow Beam (60 Degrees) LED Flood Light provides a VERY BRIGHT light source for industrial applications replacing high maintenance incandescent and expensive High Pressure Sodium & Metal Halide sources.

Because LED does not contain toxic Mercury, your lighting is much safer. These LED lamps have an average lifetime of 35,000 hours, giving you many years of maintenance free usage.

SPECIFICATIONS:

- Body material: Aluminum die casting
- Dimensions: 11.22" X 14.17"
- Color: White • Average Life: 35,000 Hours
- Wattage: 90 Watts • Lumens: 7000 lm
- Viewing Angle: 60 Degrees
- Compare to Metal Halide Lamps of 400 Watts
- Voltage: 85 to 260 VAC, 277 VAC & 250 VDC
- DC model polarity Protected
- IP Degree: IP65 = Dust and water jet protection
- Ambient Temperature Range: -40+60C

FL-90-85-260NB 85 to 260 AC 90W. Narrow Beam LED Flood Light
 FL-90-250NB 250 DC 90W. Narrow Beam LED Flood Light
 FL-90-277NB 277 AC 90W. Narrow Beam LED Flood Light
 /Photo Dust to Dawn PhotoCell
 Option (factory installed)

